


1/4





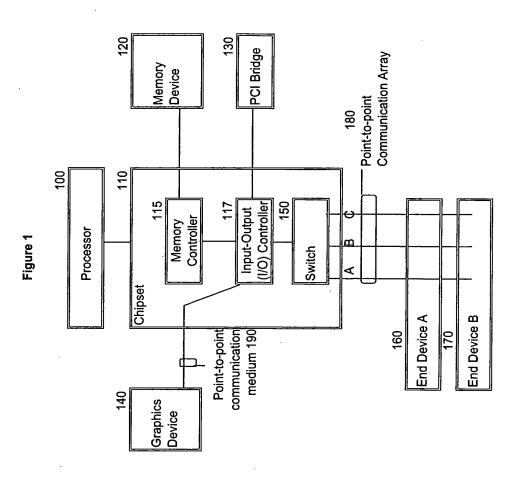

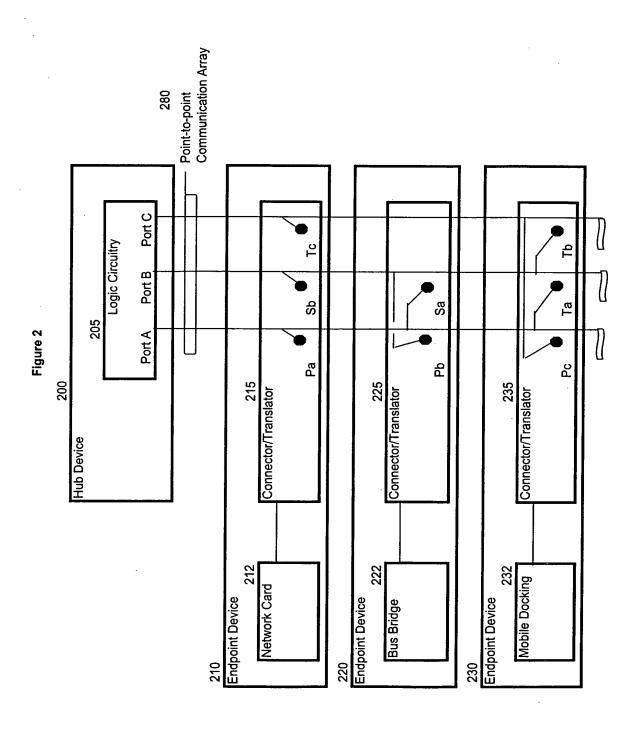

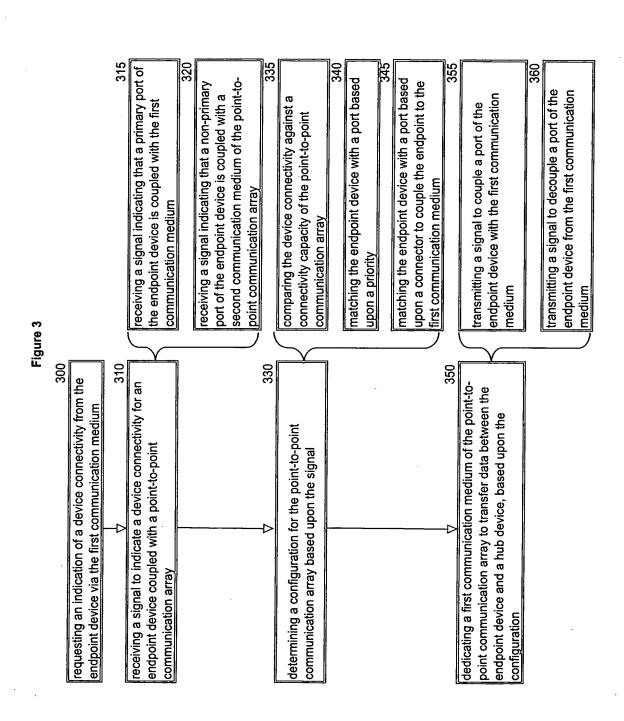

4/4

430 440 determining a configuration for the point-to dedicating a first communication medium of the point-to-point communication array device and a hub device, based upon the point communication array based upon to transfer data between the endpoint configuration the signal Figure 4 410 420 connectivity from the endpoint device via receiving a signal to indicate a device requesting an indication of a device connectivity for an endpoint device coupled with a point-to-point the communication medium Machine-readable medium communication array 400